



VFD-M

External Dimensions

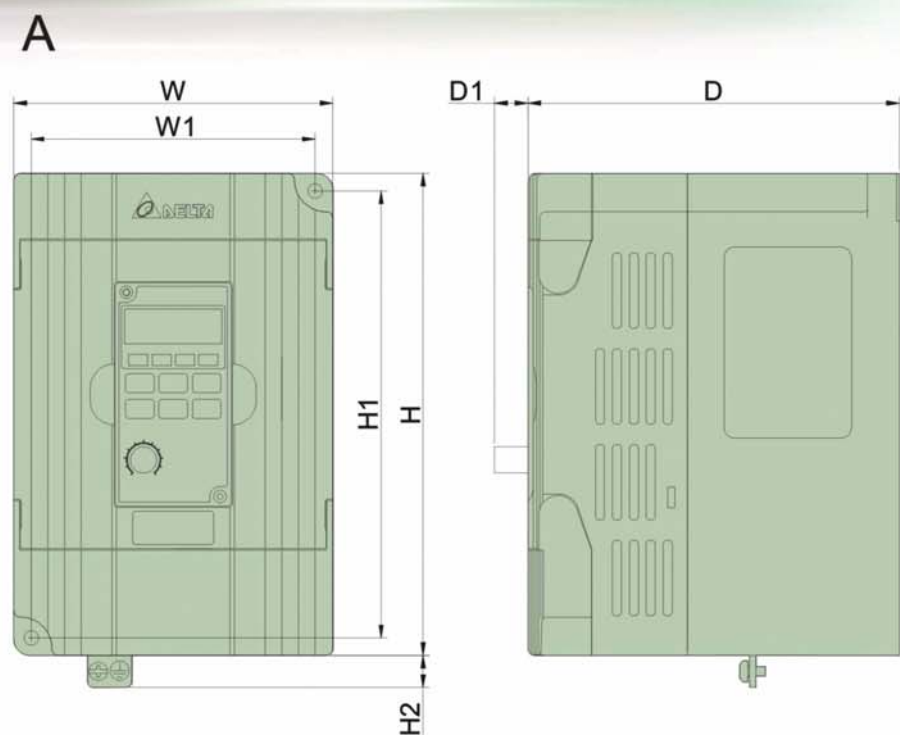

unit:mm

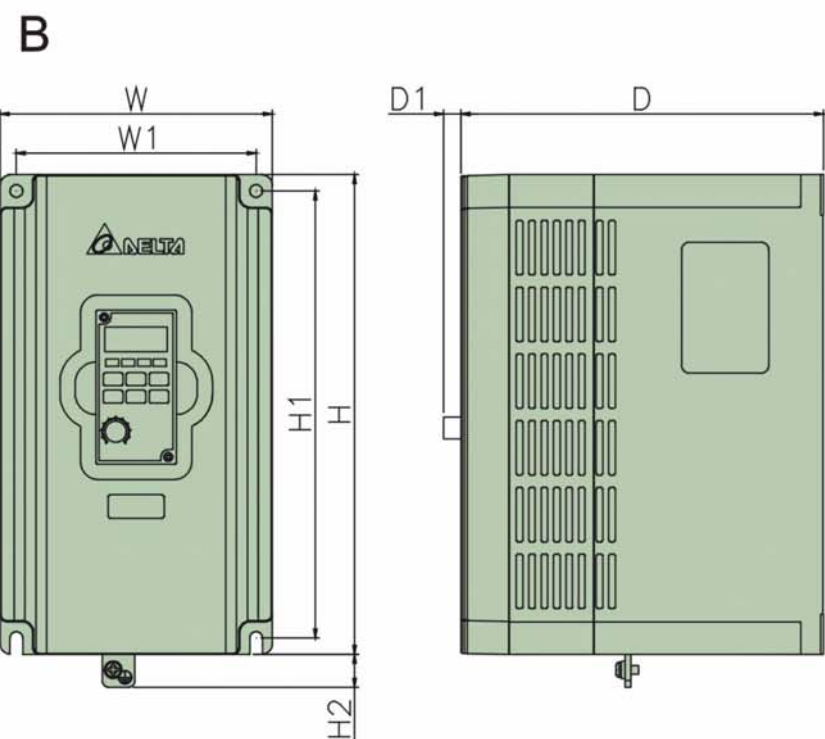

VFD-M

External Dimensions

Dimensions

Model	W	W1	H	H1	D	D1	Fan	Fig
VFD002M11A	100(3.94)	89(3.50)	151(5.94)	140(5.51)	116.5(4.59)	10.5(0.41)	Yes	A
VFD004M11A	100(3.94)	89(3.50)	151(5.94)	140(5.51)	116.5(4.59)	10.5(0.41)	Yes	A
VFD004M21A	85(3.35)	74(2.91)	141.5(5.57)	130.5(5.14)	113.0(4.45)	10.0(0.39)	Yes	A
VFD004M21B	100(3.94)	89(3.50)	151(5.94)	140(5.51)	116.5(4.59)	10.5(0.41)	Yes	A
VFD004M23A	85(3.35)	74(2.91)	141.5(5.57)	130.5(5.14)	113.0(4.45)	10.0(0.39)	Yes	A
VFD007M11A	100(3.94)	89(3.50)	151(5.94)	140(5.51)	116.5(4.59)	10.5(0.41)	Yes	A
VFD007M21A	85(3.35)	74(2.91)	141.5(5.57)	130.5(5.14)	113.0(4.45)	10.0(0.39)	Yes	A
VFD007M21B	100(3.94)	89(3.50)	151(5.94)	140(5.51)	116.5(4.59)	10.5(0.41)	Yes	A
VFD007M23A	85(3.35)	74(2.91)	141.5(5.57)	130.5(5.14)	113.0(4.45)	10.0(0.39)	Yes	A
VFD007M43B	100(3.94)	89(3.50)	151(5.94)	140(5.51)	116.5(4.59)	10.5(0.41)	Yes	A
VFD007M53A	100(3.94)	89(3.50)	151(5.94)	140(5.51)	116.5(4.59)	10.5(0.41)	Yes	A
VFD015M21A	85(3.35)	74(2.91)	141.5(5.57)	130.5(5.14)	113.0(4.45)	10.0(0.39)	Yes	A
VFD015M21B	100(3.94)	89(3.50)	151(5.94)	140(5.51)	116.5(4.59)	10.5(0.41)	Yes	A
VFD015M23A	85(3.35)	74(2.91)	141.5(5.57)	130.5(5.14)	113.0(4.45)	10.0(0.39)	Yes	A
VFD015M43B	100(3.94)	89(3.50)	151(5.94)	140(5.51)	116.5(4.59)	10.5(0.41)	Yes	A
VFD015M53A	100(3.94)	89(3.50)	151(5.94)	140(5.51)	116.5(4.59)	10.5(0.41)	Yes	A
VFD022M21A	125(4.92)	110(4.33)	220(8.66)	205(8.07)	166.3(6.55)	8.2(0.32)	Yes	B
VFD022M23B	100(3.94)	89(3.50)	151(5.94)	140(5.51)	116.5(4.59)	10.5(0.41)	Yes	A
VFD022M43B	100(3.94)	89(3.50)	151(5.94)	140(5.51)	116.5(4.59)	10.5(0.41)	Yes	A
VFD022M53A	100(3.94)	89(3.50)	151(5.94)	140(5.51)	116.5(4.59)	10.5(0.41)	Yes	A
VFD037M23A	125(4.92)	110(4.33)	220(8.66)	205(8.07)	166.3(6.55)	8.2(0.32)	Yes	B
VFD037M43A							Yes	B
VFD037M53A							Yes	B
VFD055M23A	125(4.92)	110(4.33)	220(8.66)	205(8.07)	166.3(6.55)	8.2(0.32)	Yes	B
VFD055M43A							Yes	B
VFD055M53A							Yes	B
VFD075M43A	125(4.92)	110(4.33)	220(8.66)	205(8.07)	166.3(6.55)	8.2(0.32)	Yes	B
VFD075M53A							Yes	B

unit: mm (inch)

*We reserve the right of this catalogue contained information change without prior notice.



TermoProcesos e Instrumentación, SA. de CV.

Filósofos 301-101A Col. Tecnológico

Monterrey, NL. México ventas@termoprocessos.com

www.termoprocessos.com tpisysmx@intercable.net

52 (81) 83 59 61 30 - 52 (81) 83 59 62 29 - Fax 52 (81) 83 58 37 77



DELTA ELECTRONICS, INC.

VFD

Delta VFD-M Series Variable Speed AC Motor Drives



Features:

- ▶ 16-bit microprocessor controlled PWM output
- ▶ Automatic torque boost & slip compensation
- ▶ Output frequency 0.1~400Hz
- ▶ 8-step speed control & 7-step process control
- ▶ Low-noise carrier frequency up to 15kHz
- ▶ 2 accel./decel. times & S-curve
- ▶ Process follower 0~10VDC, 4~20mA
- ▶ Communication interface RS-485 (Baud rate 38400)
- ▶ Energy saving & automatic voltage regulation
- ▶ Adjustable V/F curve & Simple vector control
- ▶ Automatic adjustment of accel./decel. times
- ▶ PID feedback control
- ▶ Simple position function
- ▶ 0 Speed Holding function
- ▶ Sleep / Revival function build-in

Voltage Range:

- 1 Phase 115V Series : 0.2~0.75KW (0.25~1HP)
- 1 Phase 230V Series : 0.4~2.2KW (0.5~3HP)
- 3 Phase 230V Series : 0.4~5.5KW (0.5~7.5HP)
- 3 Phase 460V Series : 0.75~7.5KW (1~10HP)
- 3 Phase 575V Series : 0.75~7.5KW (1~10HP)




VFD-M series have been approved by CE and UL

WWW.TERMOPROCESOS.COM



VFD-M

Standard wiring diagram

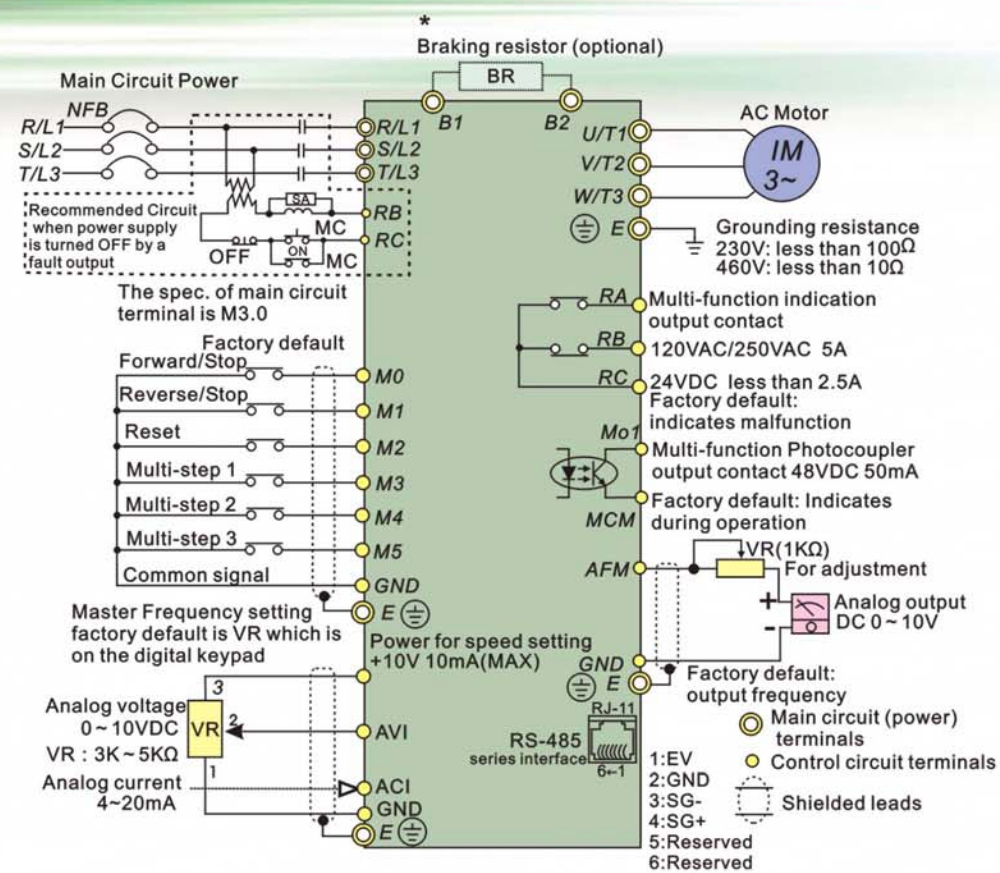

NOTE: Do not plug a Modem or telephone line to the RS-485 communication port, permanent damage may result. Terminal 1 & 2 are the power sources for the optional copy keypad and should not be used while using RS-485 communication.

* If it is single phase model, please select any of the two input power terminals in main circuit power.
* Single phase model can be input 3-phase power.

VFD-M

Standard specifications

230V Series 1-Phase/3-Phase

	Model Number VFD□□□M	004	007	015	022	037	055
	Max. Applicable Motor Output (kW)	0.4	0.75	1.5	2.2	3.7	5.5
	Max. Applicable Motor Output (HP)	0.5	1.0	2.0	3.0	5.0	7.5
Output Rating	Rated Output Capacity (kVA)	1.0	1.9	2.7	3.8	6.5	9.5
	Rated Output Current (A)	2.5	5.0	7.0	10	17	25
	Maximum Output Voltage (V)	3-Phase Proportional to input voltage					
	Output Frequency (Hz)	0.1~400Hz					
	Carrier Frequency (kHz)	1-15					
Input Rating	Rated Input Current (A)	Single / 3-Phase			3-Phase		
		6.3 / 2.9	11.5 / 7.6	15.7 / 8.8	27 / 12.5	19.6	28
	Single (3-phase) Input Current	3.2	6.3	9.0	12.5		
	Rated Voltage , Frequency	Single / 3-Phase 200-240V , 50 / 60Hz			3-Phase 200-240V , 50 / 60Hz		
	Voltage Tolerance	± 10%(180~264V)					
	Frequency Tolerance	± 5%(47~63Hz)					
	Cooling Method	Fan Cooled					
	Weight (Kg)	2.2 / 1.5	2.2 / 1.5	2.2 / 1.5	2.2	3.2	3.2

460V Series 3-Phase

	Model Number VFD□□□M	007	015	022	037	055	075
	Max. Applicable Motor Output (kW)	0.75	1.5	2.2	3.7	5.5	7.5
	Max. Applicable Motor Output (HP)	1.0	2.0	3.0	5.0	7.5	10
Output Rating	Rated Output Capacity (kVA)	2.3	3.1	3.8	6.2	9.9	13.7
	Rated Output Current (A)	3.0	4.0	5.0	8.2	13	18
	Maximum Output Voltage (V)	3-Phase Proportional to input voltage					
	Output Frequency (Hz)	0.1~400Hz					
	Carrier Frequency (kHz)	1-15					
Input Rating	Rated Input Current (A)	3-Phase			3-Phase		
		4.2	5.7	6.0	8.5	14	23
	Rated Voltage , Frequency	3-Phase 380 to 480V , 50 / 60Hz					
	Voltage Tolerance	± 10%(342~528V)					
	Frequency Tolerance	± 5%(47~63Hz)					
	Cooling Method	Fan Cooled					
	Weight (Kg)	1.5	1.5	2.0	3.2	3.2	3.3

575V Series 3-Phase

	Model Number VFD□□□M	007	015	022	037	055	075
	Max. Applicable Motor Output (kW)	0.75	1.5	2.2	3.7	5.5	7.5
	Max. Applicable Motor Output (HP)	1.0	2.0	3.0	5.0	7.5	10
Output Rating	Rated Output Capacity (kVA)	1.7	3.0	4.2	6.6	9.9	12.2
	Rated Output Current (A)	1.7	3.0	4.2	6.6	9.9	12.2
	Maximum Output Voltage (V)	3-Phase Proportional to input voltage					
	Output Frequency (Hz)	0.1~400Hz					
	Carrier Frequency (kHz)	1-10					
Input Rating	Rated Input Current (A)	3-Phase			3-Phase		
		2.4	4.2	5.9	7.0	10.5	12.9
	Rated Voltage , Frequency	3-Phase 500 to 600V , 50 / 60Hz					
	Voltage Tolerance	-15% , +10% (425~660V)					
	Frequency Tolerance	± 5%(47~63Hz)					
	Cooling Method	Fan Cooled					
	Weight (Kg)	1.5	1.5	2.0	3.2	3.2	3.3

VFD-M

Standard specifications

Control Characteristics	Control System	SPWM (Sinusoidal Pulse Width Modulation) control (V/F or sensorless vector control)		
	Freq. Setting Resolution	0.1Hz		
	Output Frequency Resolution	0.1Hz		
	Torque Characteristics	Including the auto-torque, auto-slip compensation; starting torque can be 150% at 5.0Hz		
	Overload Endurance	150% of rated current for 1 minute		
	Skip Frequency	Three zones, settings range 0.1-400Hz		
	Accel/Decel Time	0.1 to 600 seconds (2 independent settings for Accel/Decel Time)		
	Stall Prevention Level	20%-200%, Setting of Rated Current		
	Frequency Setting	20%-200%, Setting of Rated Current		
	Operating Characteristics	DC Injection Braking	Operation frequency 0-60Hz, output 0-100% rated current Start time 0-5 seconds, stop time 0-25 seconds	
Braking Torque		Approx. 20% (up to 125% possible with option braking resistor or braking unit externally mounted)		
V/F Pattern		Adjustable V/F pattern		
Frequency Setting		Keypad	Set by ▲ / ▼	
		External Signal	Potentiometer-5KΩ/0.5W, 0 to +10VDC; 4 to 20mA, RS-485 interface; Multi-Function Inputs 0 to 5 (7 steps, Jog, up/down)	
Operation Setting		Keypad	Set by RUN, STOP	
		External Signal	2 wires / 3 wires (Run, Stop, Forward / Rev.), JOG operation, RS-485 serial interface (MODBUS)	
Multi-Function Input Signal		Multi-step selection 0 to 7, Jog, accel/decel inhibit, first to forth accel/decel switches, counter, PLC operation, external Base Block (NC, NO), auxiliary motor control is invalid, ACI/AVI selections, drive reset, UP/DOWN key settings, sink/source selection		
Multi-Function Output Indication		AC Drive Operating, Frequency Attained, Non-zero, Base Block, Fault Indication, Local/Remote indication, PLC Operation indication, Auxiliary Motor Output, Driver is Ready, Overheat, Alarm, Emergency Stop		
Analog Output Signal		Analog frequency/current signal output.		
Alarm Output Contact	1Form C contact or open collector output.			
Operation Functions	AVR, S-Curve, Over-Voltage, Over-Current Stall Prevention, Fault Records, Adjustable Carrier Frequency, DC Braking, Momentary Power Loss restart, Auto Tuning, Frequency Limits, Parameter Lock/Reset, Vector Control, Counter, PID Control, PLC, MODBUS Communication, Reverse Inhibition, abnormal reset, abnormal re-start, digital frequency output, sleep/revival function, 1 st/2nd frequency source selections			
Protective Functions	Self-testing, Over Voltage, Over Current, Under Voltage, Overload, Overheating, External Fault, Electronic thermal, Ground Fault.			
Display Keypads	6-key, 4-digit, 7-segment LED, 4 status LEDs, master frequency, output frequency, Output current, custom units, parameter values for setup, review and faults, RUN, STOP, RESET, FWD/REV			
Environmental Conditions	Protection Level	IP20		
	Pollution Degree	2		
	Installation Location	Altitude 1,000m or less, keep from corrosive gas, liquid and dust		
	Ambient Temperature	-10°C to 40°C (-10°C to 50°C without blind plate) Non-Condensing and not frozen		
	Storage / Transportation Temperature	-20°C to 60°C		
Ambient Humidity	Below 90% RH (non-condensing)			
Vibration	9.80665m/s ² (1G) less than 20Hz, 5.88m/s ² (0.6G) at 20 to 50Hz			
Approvals	CE cUL US			

Standard specifications

115V Series 1-Phase

	Mode Number VFD□□□M	002	004	007
	Max. Applicable Motor Output (kW)	0.2	0.4	0.75
	Max. Applicable Motor Output (HP)	0.25	0.5	1.0
Output Rating	Rated Output Capacity (kVA)	0.6	1.0	1.6
	Rated Output Current (A)	1.6	2.5	4.2
	Maximum Output Voltage (V)	3-Phase proportional to twice the Input Voltage		
	Output Frequency (Hz)	0.1~400Hz		
	Carrier Frequency (kHz)	1-15		
Input Rating	Rated Input Current (A)	Single Phase		
		6	9	16
	Rated Voltage , Frequency	Single phase 100-120V , 50/60Hz		
	Voltage Tolerance	±10%(90~132V)		
	Frequency Tolerance	± 5%(47~63Hz)		
	Cooling Method	Fan Cooled		
	Weight(Kg)	1.5	1.5	1.5