


Alloy Valves and Control


FLOW NOZZLES

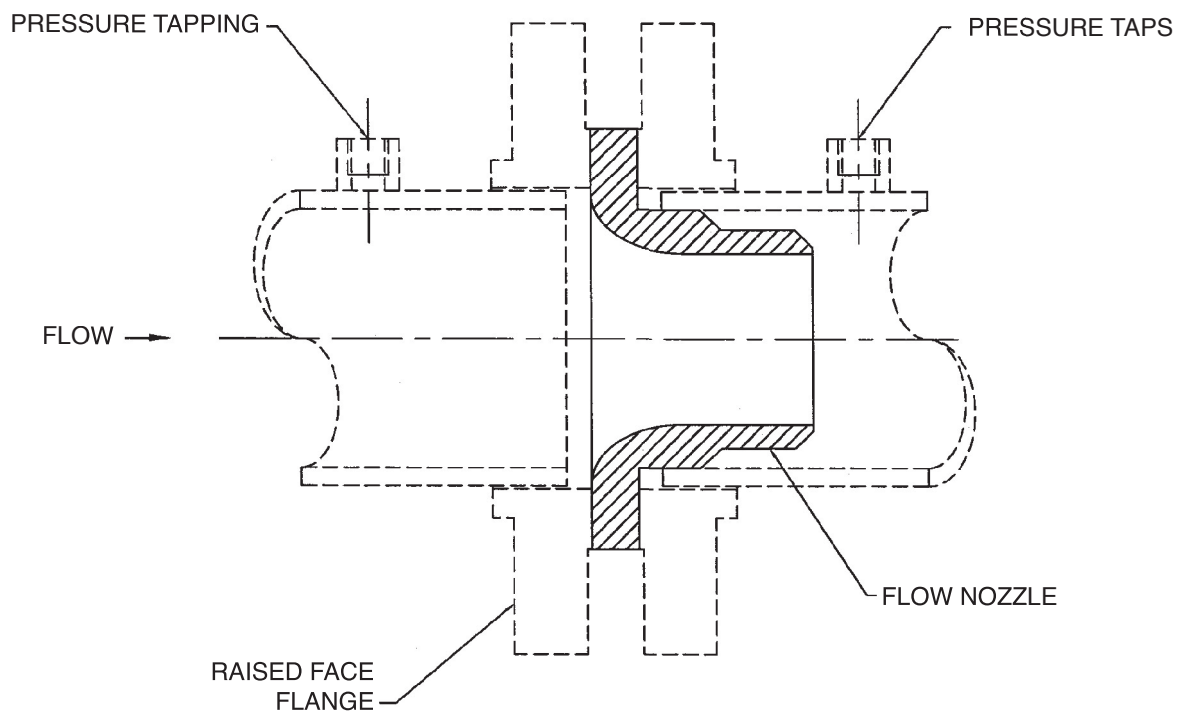

Flow Nozzels are recommended for long term service applications. The Flow Nozzle has improved accuracy at higher flow rates. AVCO Flow Nozzles are manufactured to ASME standards.

PERMANENT PRESSURE DROP VS. BETA RATIO FOR ORIFICE PLATES WITH FLANGE TAPS

PERMANENT PRESSURE LOSS $\Delta P_{PL} \left(1 - 0.24 \beta - 0.52 \beta^2 - 0.16 \beta^3 \right) \Delta P$

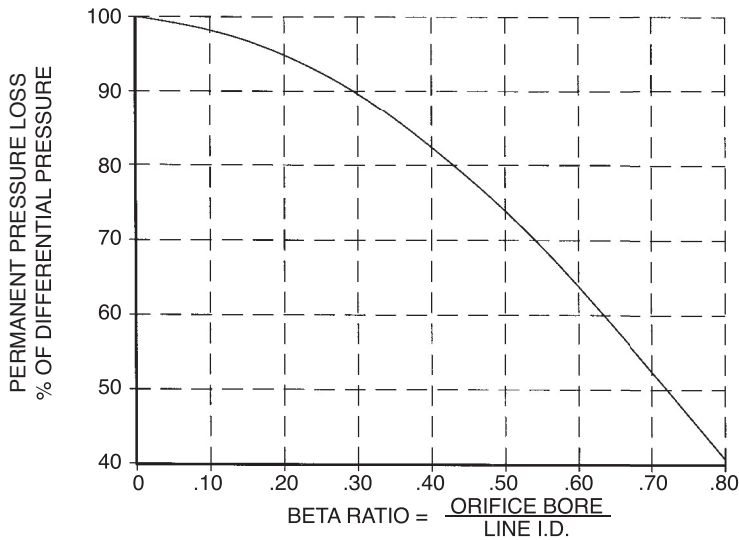

PERMANENT PRESSURE DROP VS BETA RATIO FOR ORIFICE PLATE WITH FLANGE TAPS

PERMANENT PRESSURE DROP VS. BETA RATIO FOR DIFFERENTIAL DEVICES

